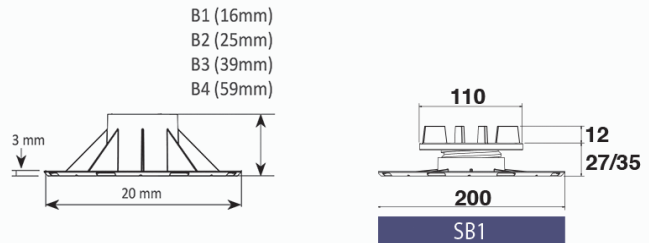


# Adjustable support SB 1

Self-leveling adjustable supports for elevated floors  
(from 27 to 35 mm)

Adjustable supports for elevated internal and external floors



## SPECIFICATION

Supply and installation of "Basic" type raised flooring supports, adjustable in height.

The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm and a head screw having a height varying from 27 mm to 35 mm, the head is equipped with n. 4 spacer fins h 12 mm and 4 mm thick.

In the base there are holes for the outflow of water and n. 4 "guide" lines to facilitate cutting in case of need.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SB 1
Characteristics	Height adjustment.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. 15mm

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	195 mm	+/- mm 1,0
Base thickness	3 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	298 cmq	+/- cmq 5
Minimum height	27 mm	+/- mm 1,0
Maximum height	35 mm	+/- mm 1,5
Thickness of spacer fins	4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,181 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		14,55 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		8,36 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

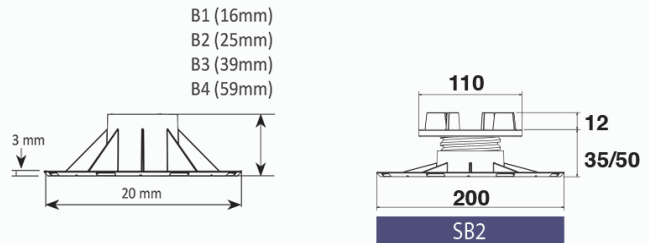
Pieces for box	40
Boxes for pallets	42
Box size	39 x 39 x 29,5 cm
Box weight	8 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SB 2

Self-leveling adjustable supports for elevated floors  
(from 35 to 50 mm)

Adjustable supports for elevated internal and external floors



## SPECIFICATION

Supply and installation of "Basic" type raised flooring supports, adjustable in height.

The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm and a head screw having a height varying from 35 mm to 50 mm, the head is equipped with n. 4 spacer fins h 12 mm and 4 mm thick.

In the base there are holes for the outflow of water and n. 4 "guide" lines to facilitate cutting in case of need.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SB 2
Characteristics	Height adjustment.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. 15mm

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	195 mm	+/- mm 1,0
Base thickness	3 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	298 cmq	+/- cmq 5
Minimum height	35 mm	+/- mm 1,0
Maximum height	50 mm	+/- mm 1,5
Thickness of spacer fins	4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,184 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		21,15 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,70 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

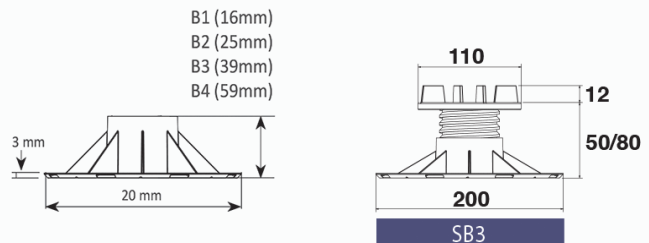
Pieces for box	30
Boxes for pallets	42
Box size	39 x 39 x 29,5 cm
Box weight	6,3 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SB 3

Self-leveling adjustable supports for elevated floors  
(from 50 to 80 mm)

Adjustable supports for elevated internal and external floors



## SPECIFICATION

Supply and installation of "Basic" type raised flooring supports, adjustable in height.

The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm and a head screw having a height varying from 50mm to 80 mm, the head is equipped with n. 4 spacer fins h 12 mm and 4 mm thick.

In the base there are holes for the outflow of water and n. 4 "guide" lines to facilitate cutting in case of need.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SB 3
Characteristics	Height adjustment.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. 15mm

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	195 mm	+/- mm 1,0
Base thickness	3 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	298 cmq	+/- cmq 5
Minimum height	50 mm	+/- mm 1,0
Maximum height	80 mm	+/- mm 1,5
Thickness of spacer fins	4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,206 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		21,31 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		12,23 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

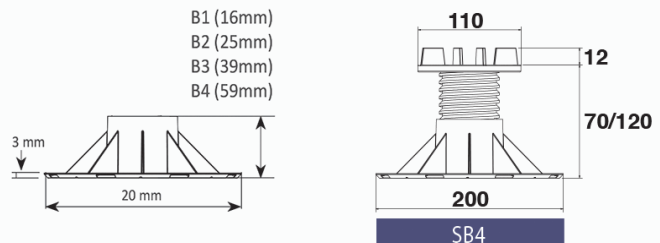
Pieces for box	35
Boxes for pallets	30
Box size	40 x 40 x 42 cm
Box weight	8 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on  
[www.betonwood.com](http://www.betonwood.com)

# Adjustable support SB 4

Self-leveling adjustable supports for elevated floors  
(from 70 to 120 mm)

Adjustable supports for elevated internal and external floors



## SPECIFICATION

Supply and installation of "Basic" type raised flooring supports, adjustable in height.

The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm and a head screw having a height varying from 70 mm to 120 mm, the head is equipped with n. 4 spacer fins h 12 mm and 4 mm thick.

In the base there are holes for the outflow of water and n. 4 "guide" lines to facilitate cutting in case of need.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SB 4
Characteristics	Height adjustment.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. 15mm

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	195 mm	+/- mm 1,0
Base thickness	3 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	298 cmq	+/- cmq 5
Minimum height	70 mm	+/- mm 1,0
Maximum height	120 mm	+/- mm 1,5
Thickness of spacer fins	4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,250 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		19,21 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,38 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

Pieces for box	25
Boxes for pallets	30
Box size	40 x 40 x 42 cm
Box weight	7 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)