



# Adjustable support SE 0

Self-leveling adjustable supports for elevated floors  
(from 28 to 38 mm) with bi-material head (pp+rubber)

**Beton**  **Wood**

Adjustable supports for elevated internal and external floors

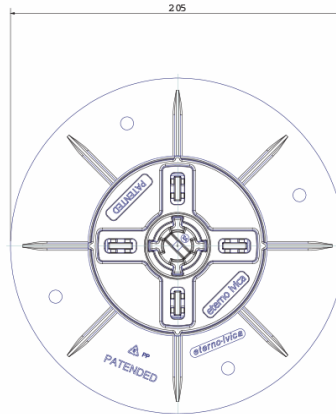

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of mm. 205, a screw having height varying from 28mm to 38mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 0
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	28 mm	+/- mm 1,0
Maximum height	38 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,260 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		19,93 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,61 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	50
Boxes for pallets	30
Box size	40 x 40 x 42 cm
Box weight	13,825 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 1

Self-leveling adjustable supports for elevated floors  
(from 37,5 to 50 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

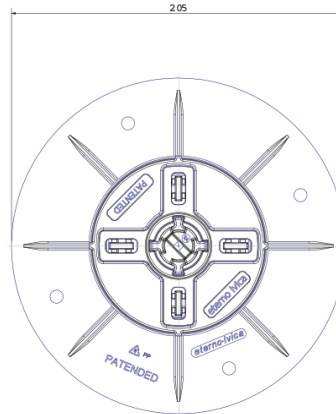

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 37,5 mm to 50 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 1
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	37,5 mm	+/- mm 1,0
Maximum height	50 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,320 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		16,06 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,49 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

Pieces for box	50
Boxes for pallets	30
Box size	40 x 40 x 42 cm
Box weight	13,6 kg
Pallet dimensions	80 x 120 cm



For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 2

Self-leveling adjustable supports for elevated floors  
(from 50 to 75 mm) with bi-material head (pp+rubber)

**Beton**  **Wood**

Adjustable supports for elevated internal and external floors

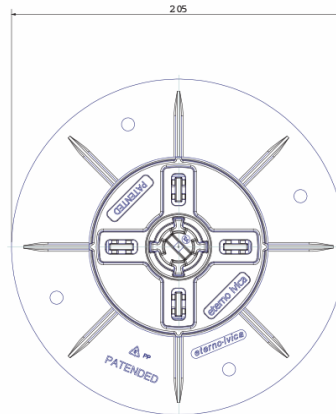

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 50 mm to 75 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 2
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	50 mm	+/- mm 1,0
Maximum height	75 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,352 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		16,47 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		14,04 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	30
Boxes for pallets	30
Box size	40 x 40 x 42 cm
Box weight	11,4 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 3

Self-leveling adjustable supports for elevated floors  
(from 75 to 120 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

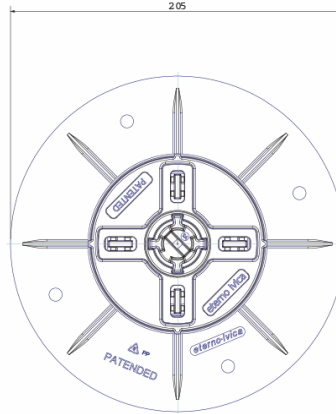

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 75 mm to 120 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 3
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	75 mm	+/- mm 1,0
Maximum height	120 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,458 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		19,55 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		15,23 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	30
Boxes for pallets	20
Box size	39,5 x 60 x 42,5 cm
Box weight	14,7 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 4

Self-leveling adjustable supports for elevated floors  
(from 120 to 170 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

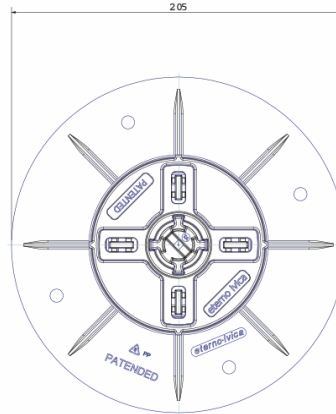

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 120 mm to 170 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	120 mm	+/- mm 1,0
Maximum height	170 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,518 kg	+/- 5 %

## PHYSICAL-CHEMICAL CHARACTERISTICS



Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 4
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		20,98 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		17,84 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d



## PACKAGING AND STORAGE

Pieces for box	25
Boxes for pallets	20
Box size	39,5 x 60 x 42,5 cm
Box weight	14 kg
Pallet dimensions	80 x 120 cm

# Adjustable support SE 5

Self-leveling adjustable supports for elevated floors  
(from 170 to 215 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

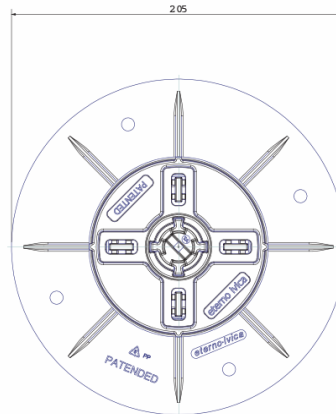

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 170 mm to 215 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	170 mm	+/- mm 1,0
Maximum height	215 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,609 kg	+/- 5 %

## PHYSICAL-CHEMICAL CHARACTERISTICS



Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 5
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		18,67 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		14,62 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PACKAGING AND STORAGE



Pieces for box	25
Boxes for pallets	20
Box size	39,5 x 60 x 42,5 cm
Box weight	14,7 kg
Pallet dimensions	80 x 120 cm



# Adjustable support SE 6

Self-leveling adjustable supports for elevated floors  
(from 140 to 230 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

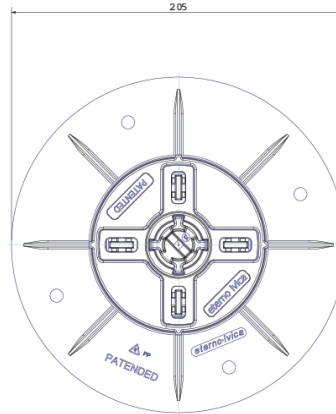

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 140 mm to 230 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 6
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	140 mm	+/- mm 1,0
Maximum height	230 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,694 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		16,30 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		10,71 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	30 SE3 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	14,7 + 10,2 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 7

Self-leveling adjustable supports for elevated floors  
(from 185 to 275 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

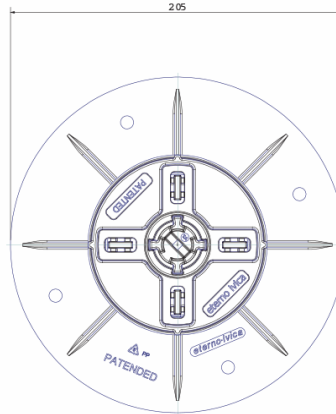

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 185 mm to 275 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 7
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	185 mm	+/- mm 1,0
Maximum height	275 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,754 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		16,14 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		12,28 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

Pieces for box	25 SE4 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	14,0 + 10,2 kg
Pallet dimensions	80 x 120 cm



For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)



# Adjustable support SE 8

Self-leveling adjustable supports for elevated floors  
(from 235 to 325 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

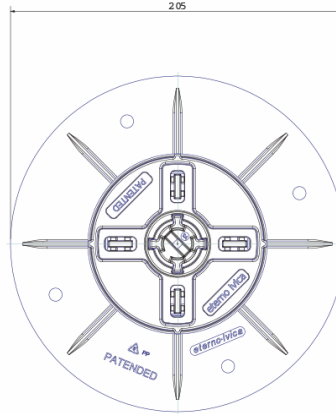

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 235 mm to 325 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 8
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	235 mm	+/- mm 1,0
Maximum height	325 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,845 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		15,02 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		12,68 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	25 SE5 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	16,2 + 10,2 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 9

Self-leveling adjustable supports for elevated floors  
(from 205 to 345 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

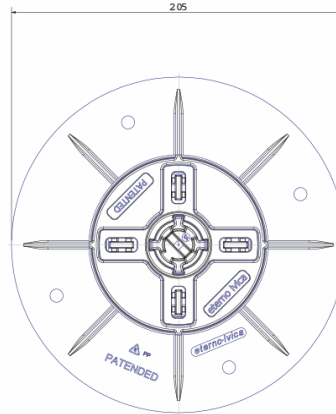

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 205 mm to 345 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	205 mm	+/- mm 1,0
Maximum height	345 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,93 kg	+/- 5 %

## PHYSICAL-CHEMICAL CHARACTERISTICS



Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 9
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		15,32 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,01 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d



## PACKAGING AND STORAGE

Pieces for box	30 SE3 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	14,7 + 10,2 kg
Pallet dimensions	80 x 120 cm

# Adjustable support SE 10

Self-leveling adjustable supports for elevated floors  
(from 250 to 385 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

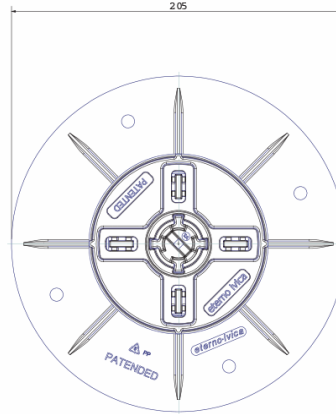

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 250 mm to 385 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	250 mm	+/- mm 1,0
Maximum height	385 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	0,99 kg	+/- 5 %

## PHYSICAL-CHEMICAL CHARACTERISTICS



Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 10
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		14,96 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		12,30 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d



## PACKAGING AND STORAGE

Pieces for box	25 SE4 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	14 + 10,2 kg
Pallet dimensions	80 x 120 cm

# Adjustable support SE 11

Self-leveling adjustable supports for elevated floors  
(from 300 to 400 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

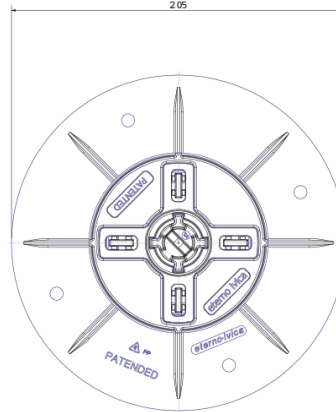

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 300 mm to 400 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 11
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	300 mm	+/- mm 1,0
Maximum height	400 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	1.08 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		15,02 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		13,81 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	25 SE5 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	16,2 + 10,2 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 12

Self-leveling adjustable supports for elevated floors  
(from 270 to 455 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

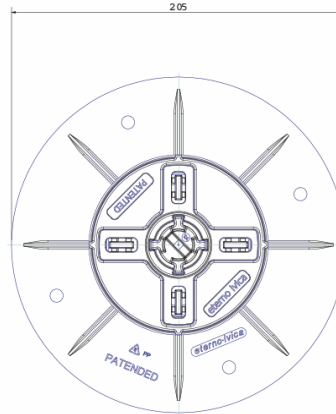

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 270 mm to 455 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 12
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	270 mm	+/- mm 1,0
Maximum height	455 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	1,17 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		15,85 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,13 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE



Pieces for box	30 SE3 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	14,7 + 10,2 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)

# Adjustable support SE 13

Self-leveling adjustable supports for elevated floors  
(from 315 to 500 mm) with bi-material head (pp+rubber)

Adjustable supports for elevated internal and external floors

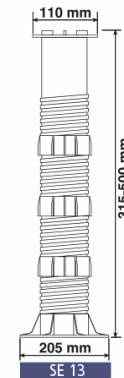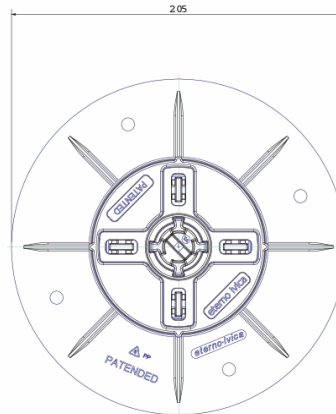

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 315 mm to 500 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 13
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	315 mm	+/- mm 1,0
Maximum height	500 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	1,23 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		15,22 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		12,04 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

Pieces for box	25 SE4 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	14 + 10,2 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)





# Adjustable support SE 14

Supporto Regolabile Autolivellante per pavimento  
(da 365 a 550 mm) con testa in bimateriale (pp+gomma)



Adjustable supports for elevated internal and external floors

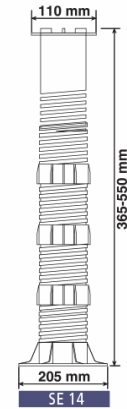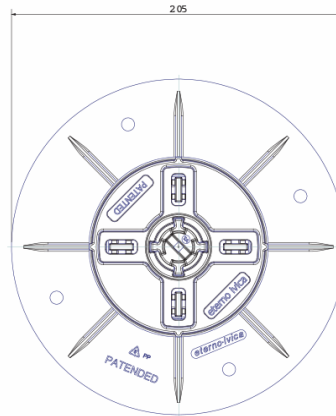

## SPECIFICATION

Supply and installation of "Eterno" type raised flooring supports, adjustable in height, equipped with self-leveling, bi-material head, with anti-slip rubber finish. The supports are made of polypropylene elements consisting of a support base with a minimum diameter of 205 mm, a screw having height varying from 365 mm to 550 mm, equipped with a security lock and a head equipped with n. 4 spacer fins, h 12mm of the thickness of 2-3-4 mm, easily removable if necessary.

In the base there are holes for the water outflow and n. 4 "guide" lines to facilitate cutting in case of need. The height adjustment is carried out by a special adjustment key as standard, which acts on the screw independently from both the head and the base.



## GENERAL CHARACTERISTICS

PRODUCT IDENTIFICATION	SE 14
Characteristics	Height adjustment. Self-leveling head in bimaterial (PP + Rubber) height adjustment Key Easily removable spreader flaps Anti-unscrewing security lock.
Materials	Polypropylene and rubber (head finish)
Environmental impact	recyclable - non-hazardous waste
Applications (SUPPORT PLANE)	on any waterproof membrane on any rigid insulation panel on any solid and compact laying surface
Applications (FLOORS)	with any prefabricated element self-supporting for floorings from external, with thickness min. mm. 15

## MORPHOLOGICAL CHARACTERISTICS

Characteristics	Values/Unity	Tolerance
Base diameter	205 mm	+/- mm 1,0
Base thickness	5 mm	+/- mm 0,2
Head diameter	110 mm	+/- mm 0,8
Support surface	330 cmq	+/- cmq 5
Minimum height	365 mm	+/- mm 1,0
Maximum height	550 mm	+/- mm 1,5
Thickness of spacer fins	2-3-4 mm	+/- mm 0,2
Height of spacer fins	12 mm	+/- mm 0,2
Weight	1,32 kg	+/- 5 %

## TECHNICAL CHARACTERISTICS

CENTRAL COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		16,07 KN
ECCENTRIC COMPRESSION LIMIT RESISTANCE * (calculated at average height, betw. minimum and maximum)		11,92 KN
Slope compensation		0 -5 %
Hardness		70 (+/- 3) Shore d

## PHYSICAL-CHEMICAL CHARACTERISTICS

Reaction to fire (according to UNI EN13501-1:2009)	E class
Resistance to low temperatures	-40°

## PACKAGING AND STORAGE

Pieces for box	25 SE5 + 40 extensions
Boxes for pallets	20 + 30
Box size	(cm 39,5x60x42,5)+(cm 40x40x42)
Box weight	16,2 + 10,2 kg
Pallet dimensions	80 x 120 cm

For further information contact our technical office on [www.betonwood.com](http://www.betonwood.com)